

# HIGH SPEED DETECTORS

## Optical Receivers for RF over Fiber Applications

### PRODUCT DATASHEET

---

The DT family high speed detector module is designed for both digital and analog applications with 50  $\Omega$  impedance matched RF connections.

The module contains an InGaAs MUTC photodiode and necessary matching electronics optimized for high linearity at high optical power. Large aperture detector variants provide high saturation photocurrent up to 120 mA, and small aperture detector variants provide high bandwidth up to 22 GHz. The package is hermetically sealed with a SMA or K connector compatible RF connector\*.

*\*Depending on version ordered*



### Features

- Responsivity > 0.40 A/W minimum (typically >0.5 A/W)
- High linearity at high optical power
- Extended temperature range
- SMF-28, PM, or specialty MFD fiber
- Internal or external bias-T options

### Applications

- RF links
- OC-192, STM-64
- Heterodyne detection
- Sensing
- Optical communications

## Performance Characteristics

Operating reverse bias  $V_B = 5$  V unless otherwise specified (external)


Characteristics	Symbol	Condition	Min	Typ	Max	Unit
Wavelength range	$\lambda$		1280		1620	nm
Optical return loss	$RL_O$	DC to 3-dB bandwidth		-35	-32	dB
Electrical return loss	$RL_E$			-8	-10	dB
Bias voltage	$V_B$	At rated photocurrent	-6	-5	-2	V

## Performance Characteristics (detector aperture specific)

Operating reverse bias  $V_B = 5$  V unless otherwise specified (external)

Characteristics	Symbol	Condition	20 $\mu$ m	28 $\mu$ m	50 $\mu$ m	Unit
Saturation photocurrent	$P_{Sat}$	1-dB compression, typical	80	90	120	mA
Responsivity	R	Minimum, 1550 nm	0.4	0.4	0.4	A/W
Dark current	$I_D$	Typical	0.1	0.1	1	$\mu$ A
3-dB bandwidth	BW	Typical	TBD	22	5	GHz

## Block Diagram

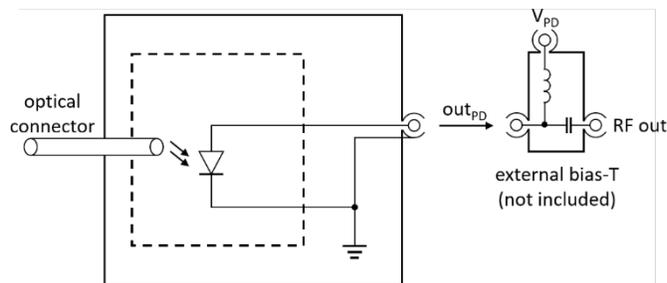

Block diagram (show with external bias-T configuration)

Typical current tuning


## Fiber Characteristics

Fiber type	PM or non-PM single mode fiber
Jacket material <sup>2</sup>	Acrylate
Core / outer / buffer <sup>2</sup> diameters	8 $\mu\text{m}$ / 125 $\mu\text{m}$ / 250 $\mu\text{m}$
Minimum fiber length	1.0 m
Minimum bend radius	35 mm
Proof strength	100 kPSI
Connector <sup>3</sup> , output polarization	FC/APC, polarization parallel to slow axis

<sup>2</sup> Optional additional 900  $\mu\text{m}$  loose-tube PVDF buffer recommended for laboratory use.

<sup>3</sup> Other connector options available, contact sales for more information.

## Mechanical Drawing

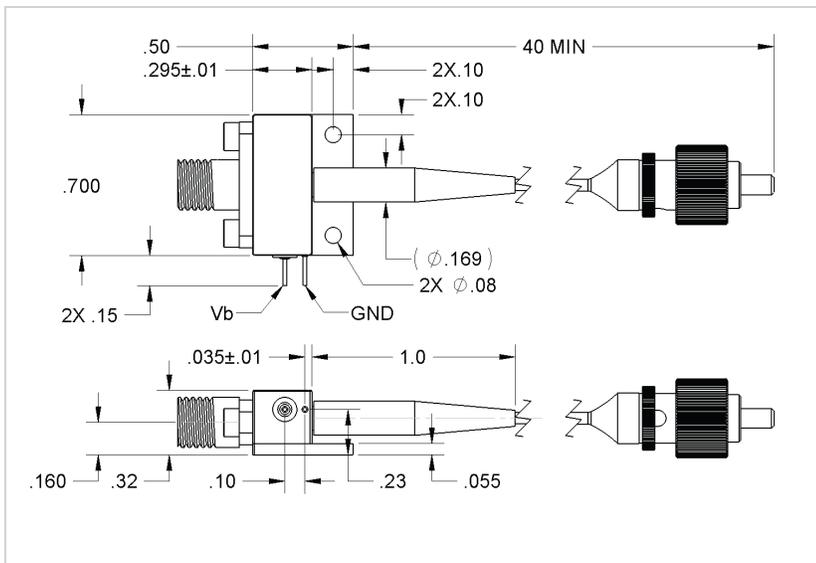

Absolute Maximum Ratings	Symbol	Min	Max	Unit
Storage temperature	T <sub>STG</sub>	-55	85	°C
Operating case temperature	T <sub>op</sub>	-40	85	°C
Operating reverse bias	V <sub>B</sub>	-12	1	V
Lead soldering time			10	s
Lead soldering temperature			250	°C
ESD (HBM)			500	V

- Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only and operation of the device at or beyond these conditions is not implied. Exposure to absolute maximum ratings for extended periods of time may affect device reliability.

## Ordering information

Example part number: DT0201-022-080-PM250-FCA-NA

Order	①	②	③	④														
D	T	0	2	0	1	-	0	2	2	-	S	M	F	2	8	-	N	A

①	Model <sup>1</sup>	Standard	
	Code	0201	
②	Bandwidth <sup>1</sup>	22GHz	5GHz
	Code	022	005
③	Fiber	SM fiber	
	Code	SMF28	
④	Connector <sup>2</sup>	FC/APC <sup>2</sup>	
	Code	FCA	
⑤	Bias T	None	50 Ω
	Code	NA	50

<sup>1</sup> Custom versions or bandwidths available, contact sales for more information .

<sup>2</sup> Other connector options available, contact sales for more information.

## For further information

EM4  
T: +1 781-275-7501  
E: em4-sales@luminarsemi.com

[EM4photonics.com](http://EM4photonics.com)